




JF568



Suitable

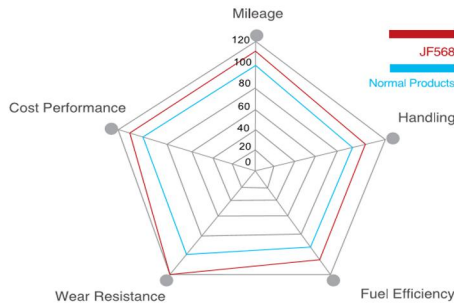

High Scrub Resistance

Special tread rubber formula offers better scrub resistance.

Stability


The tread groove design provides excellent stability and greater mileage.

Excellent Handling

Unique groove design provides excellent handling and safety.

Economical and Green

Low rolling resistance reduces fuel consumption making the tire both economical and green.



Size	Standard Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Initiated Tyre Dimension (mm)	
			KG		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
8.5R17.5	6.00	12	1450	1400	3195	3085	625	625	90	90	121	120	11	M	802	215
	6.75	14	1850	1750	4080	3860	750	750	110	110	129	127	13.5	L	842	240
9.5R17.5	6.75	16	1950	1850	4300	4080	830	830	120	120	131	129	13.5	L	842	240
	6.75	18	2725	2575	6005	5675	875	875	125	125	143	141	13.5	J	842	240
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	15	L	1085	300
	9.00	18	3550	3150	7825	6945	850	850	125	125	152	148	15	L	1085	300
205/75R17.5	6.00	14	1600	1500	3525	3315	750	750	110	110	124	122	13	M	753	205
	6.00	14	1700	1600	3750	3525	700	700	100	100	126	124	12.5	M	767	211
215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	12.5	L	767	211
	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	12.5	J	767	211
235/75R17.5	6.75	16	2000	1900	4410	4190	760	760	110	110	132	130	13	M	797	233
	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	13	L	797	233
225/70R19.5	6.75	12	1650	1550	3640	3415	660	660	95	95	125	123	12.5	L	811	226
	6.75	14	1800	1700	3970	3750	760	760	110	110	128	126	12.5	L	811	226
245/70R19.5	7.50	12	1850	1750	4080	3860	660	660	95	95	129	127	13	M	839	248
	7.50	14	2060	1950	4540	4300	760	760	110	110	133	131	13	M	839	248
245/70R19.5	7.50	16	2240	2120	4940	4675	830	830	120	120	136	134	13	M	839	248
	7.50	18	2800	2650	6175	5840	900	900	130	130	144	142	13	J	839	248
265/70R19.5	7.50	14	2300	2120	5070	4675	760	760	110	110	137	134	13.5	L	867	262
	7.50	16	2500	2360	5510	5205	760	760	110	110	140	138	13.5	M	867	262
265/70R19.5	7.50	18	2725	2575	6005	5675	900	900	130	130	143	141	13.5	J	867	262
	8.25	14	2500	2300	5510	5070	725	725	105	105	140	137	13	M	895	283
285/70R19.5	8.25	16	3000	2800	6610	6175	900	900	130	130	146	144	13	M	895	283
	8.25	16	2900	2725	6395	6005	850	850	125	125	145	143	13	M	895	283
285/70R19.5	8.25	18	3350	3150	7390	6945	900	900	130	130	150	148	13	K	895	283
	7.50	16PR	2500	2300	5510	5070	830	830	120	120	140	137	13.5	M	930	255
255/70R22.5	7.50	14PR	2360	2120	5205	4675	760	760	110	110	138	134	13.5	M	930	255
	8.25	16PR	3150	2900	6945	6395	900	900	130	130	148	145	14.5	M	958	275
11R22.5	8.25	16PR	3150	2900	6940	6395	840	840	120	120	148	145	15	M	1054	279
295/60R22.5	9.00	18	3350	3075	7390	6780	900	900	130	130	150	147	14.5	L	926	292
315/60R22.5	9.75	18	3550	3150	7825	6945	900	900	130	130	152	148	14.5	L	950	313
315/70R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	15.5	M	1014	312
	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	15.5	L	1014	312
315/70R22.5	9.00	18	3750	3350	8265	7385	900	900	130	130	154	150	15.5	L	1014	312
	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	16	M	1044	298
295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	16	M	1044	298
	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	16	M	1044	298
315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	123	123	156	150	16.5	L	1076	312
	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	16.5	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	120	120	156	153	16.5	L	1076	312

1mm=0.039inch

BRISBANE

28 Ashover Rd
Rocklea
QLD 4106

MELBOURNE

41 Paraweena Dr
Truganina
VIC 3029

SYDNEY

Rear 46 Redfern St
Wetherill Park
NSW 2164

PERTH

8 Glassford Rd
Kewdale
WA 6105

