



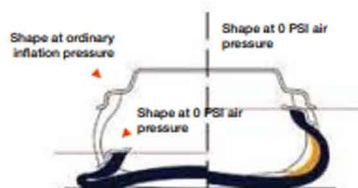

RUNFLAT YH18

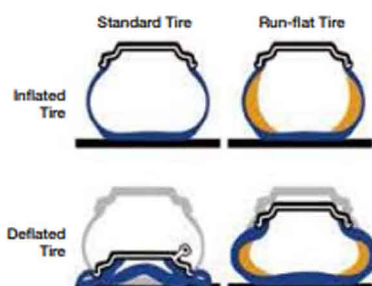

RFT Product Features:

1. No more delays or being stranded on remote highways due to a flat tire. RFT products will continue to drive at up to 80 KPH without having to be replaced immediately.
2. Helps to avoid accidents caused by the loss of control from punctures or air leaks, increasing overall safety.
3. Even when the tire begins leaking air you can drive to your local tire dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.

Run-flat tires (RFT), also known as "self-supporting run-flat tires," are an important safety feature for any vehicle. A Run-flat tire is built with a thicker sidewall to help support the tire shape after losing air. This allows the tire to continue to run safely, but at a limited speed and mileage. When normal tires are punctured, they can instantly lead to a severe sidewall collapse; in the event of a collapse, the vehicle loses its only support which can cause the vehicle's center of gravity to change instantaneously. RFT helps to lessen the severity of a flat tire and allows you to get to the closest destination safely.

GALLOPRO RUNFLAT YH18

RIM	SIZE	LI/SS		T.D.	STANDARD RIM	S.W.	O.D.	MAX.LOAD	MAX.PRESSURE	UTQG	SIDEWALL
				mm	inch	mm	mm	KG	kPa		
16	195/55RF16	91V	XL	7.4	6J	201	620	615	340	360/A/A	BSW

BRISBANE

28 Ashover Rd
Rocklea
QLD 4106

MELBOURNE

41 Paraweena Dr
Truganina
VIC 3029

SYDNEY

Rear 46 Redfern St
Wetherill Park
NSW 2164

PERTH

8 Glassford Rd
Kewdale
WA 6105

