



AP865 ON OFF ROAD / REGIONAL
ALL-POSITION

Size	Standard Rim	PR	Load				Pressure				Load Index		TreadDepth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			KG		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
CN 12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	14.5	K	1226	315
CN 13R22.5	9.75	18	4000	3350	8820	7385	875	875	125	125	156	150	18	L	1124	320
VN 12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	18	K	1085	300
VN 11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	293
CN 12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	18.0	K	1085	300

Variable pitch tread design reduces noise emissions.
Closed shoulder design ensures great stability and reduced shoulder wear.
Improved traction, cut and heat resistance.

TIRE FEATURES:

- 1 Shoulder notches improve heat dissipation to promote even shoulder wear.
- 2 Small sipe design between tread blocks and grooves better distributes force generated from the road and increases grip.
- 3 Ultra-wide running surface, shoulder design, and tread compounding improve wear resistance.
- 4 The anti-stone groove design reduces stone retention.

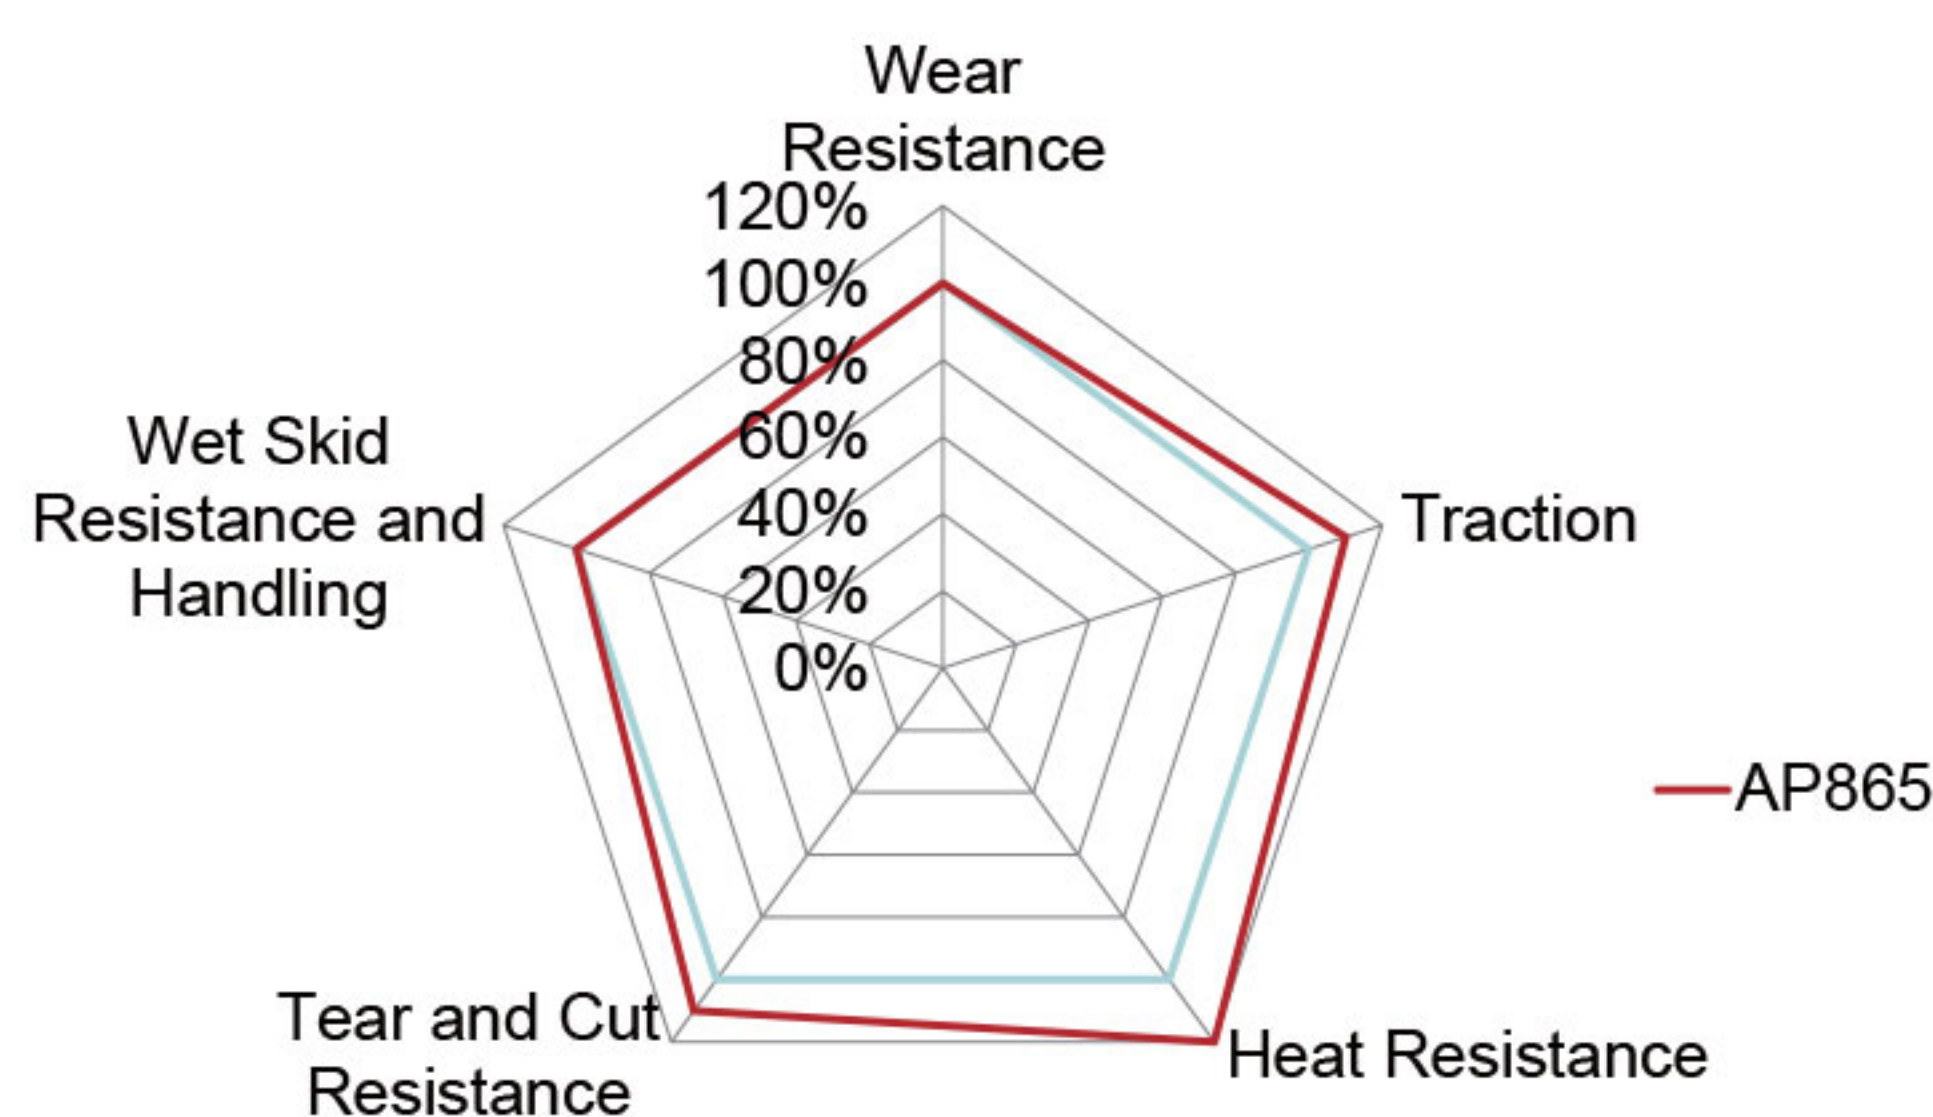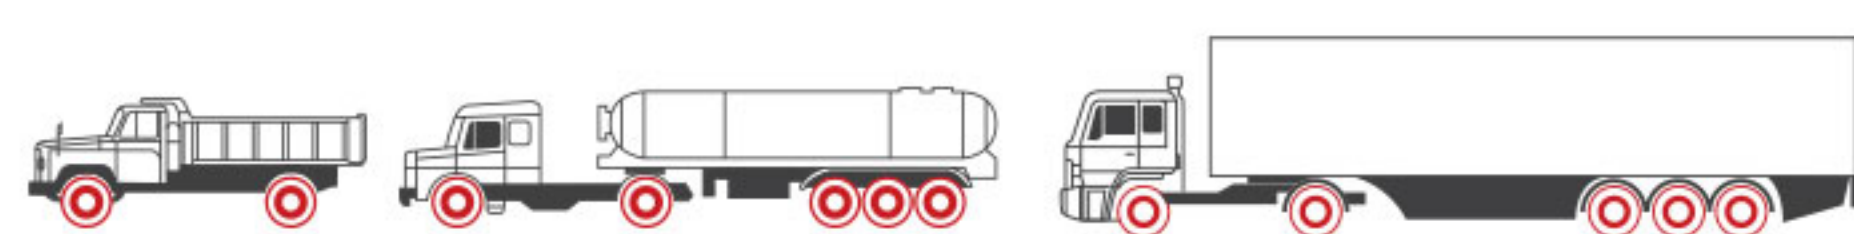

BRISBANE
28 Ashover Rd
Rocklea
QLD 4106

MELBOURNE
41 Paraweena Dr
Truganina
VIC 3029

SYDNEY
Rear 46 Redfern St
Wetherill Park
NSW 2164

PERTH
8 Glassford Rd
Kewdale
WA 6105

