


DX670 REGIONAL TRAILER


Size	Standard Rim	PR	Load				Pressure				Load Index		TreadDepth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			KG		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
CNVN 435/50R19.5	14.00	20	4500	9920	900	130	160	12.5	J	931	438					
CNVN 445/45R19.5	15.00	20	4500	9920	900	130	160	13	J	895	446					
VN 385/65R22.5	11.75	20	5000	11000	900	130	164	15.5	K	1072	389					
VN 385/65R22.5	11.75	20	4500	9920	900	130	160	15.5	K	1072	389					
VN 385/65R22.5	11.75	20	5000	11000	900	130	164	15.5	K	1072	389					

Steer and trailer position tire suitable for medium to long distance travel on good road applications.
 Special tread compounding improves wear resistance.
 Unique shoulder design and deep shoulder sipes promote even wear.
 Widened running surface improve grounding performance.

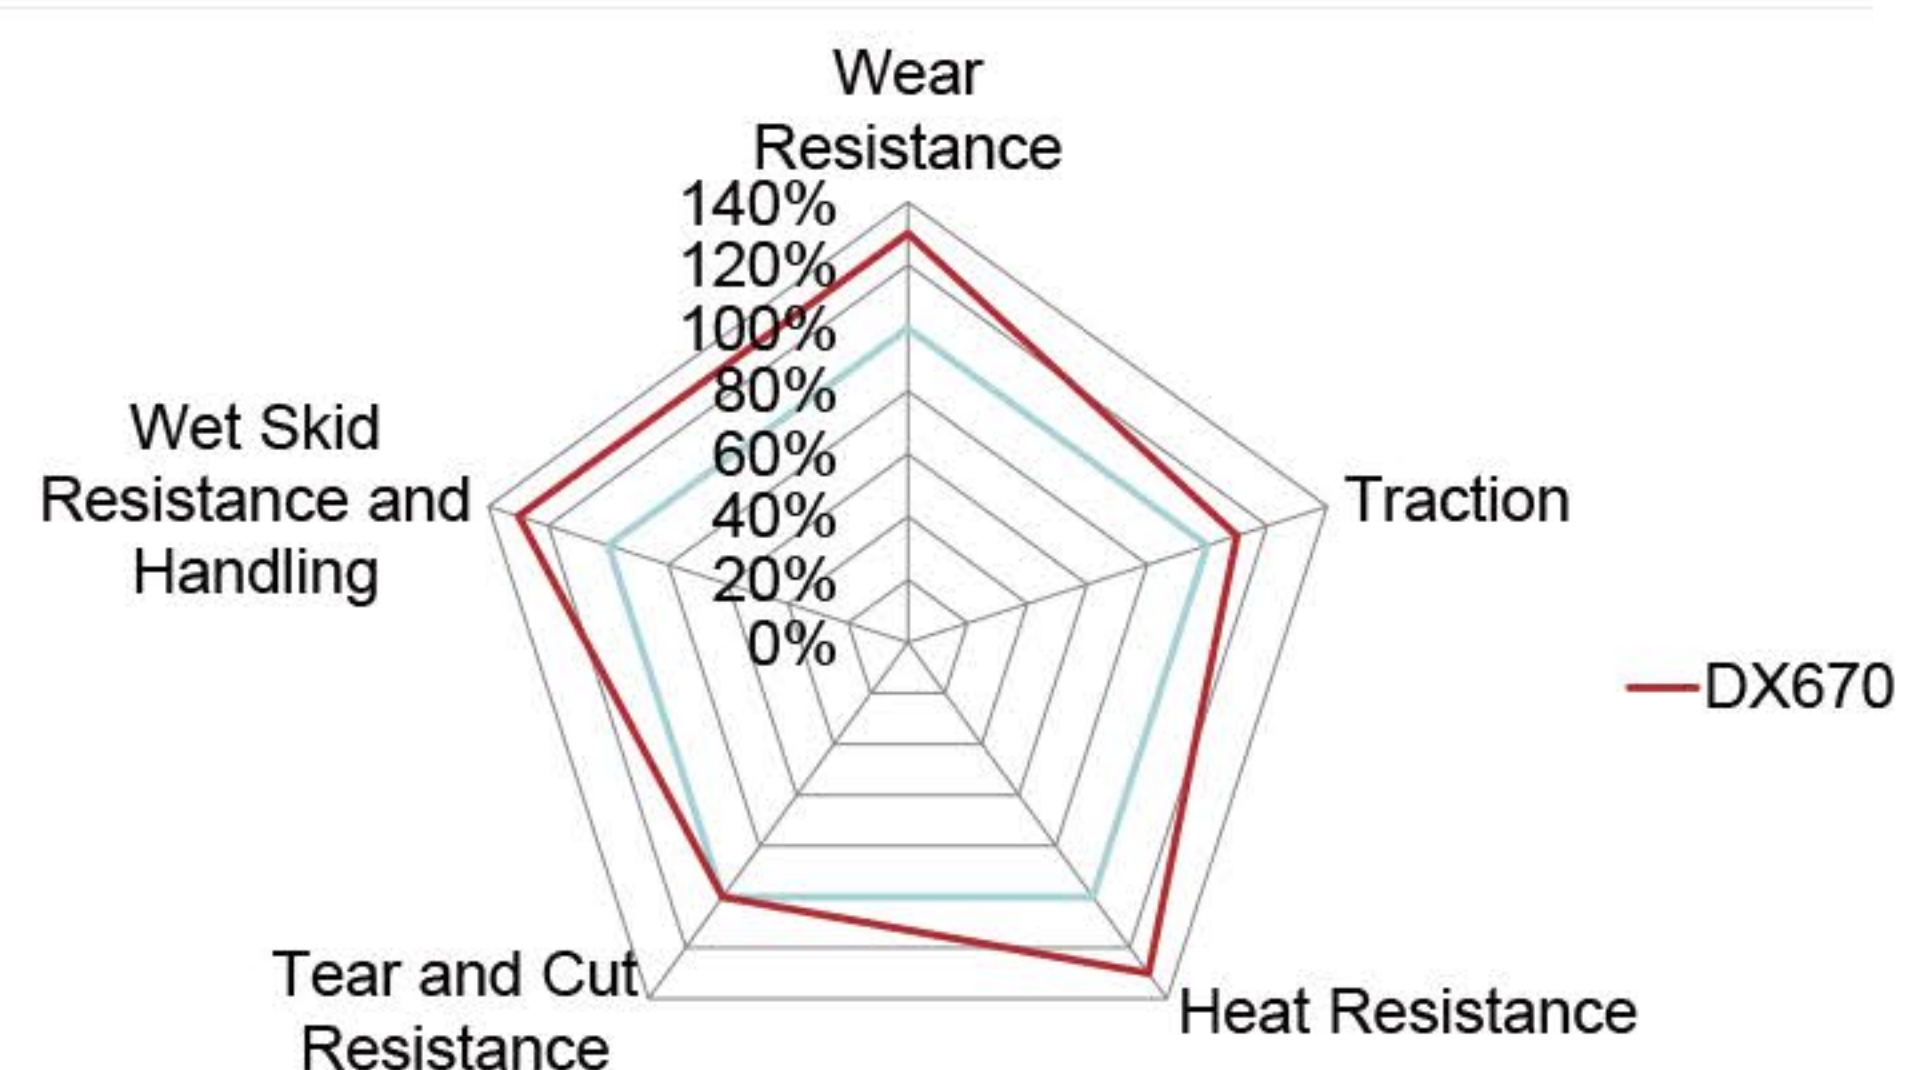

TIRE FEATURES

- 1 The sipe design provides better grip and wet skid resistance.
- 2 Widened driving surface improves pressure distribution for better grounding performance.
- 3 Zigzag design located at the bottom of the main grooves improve handling and driving comfort.

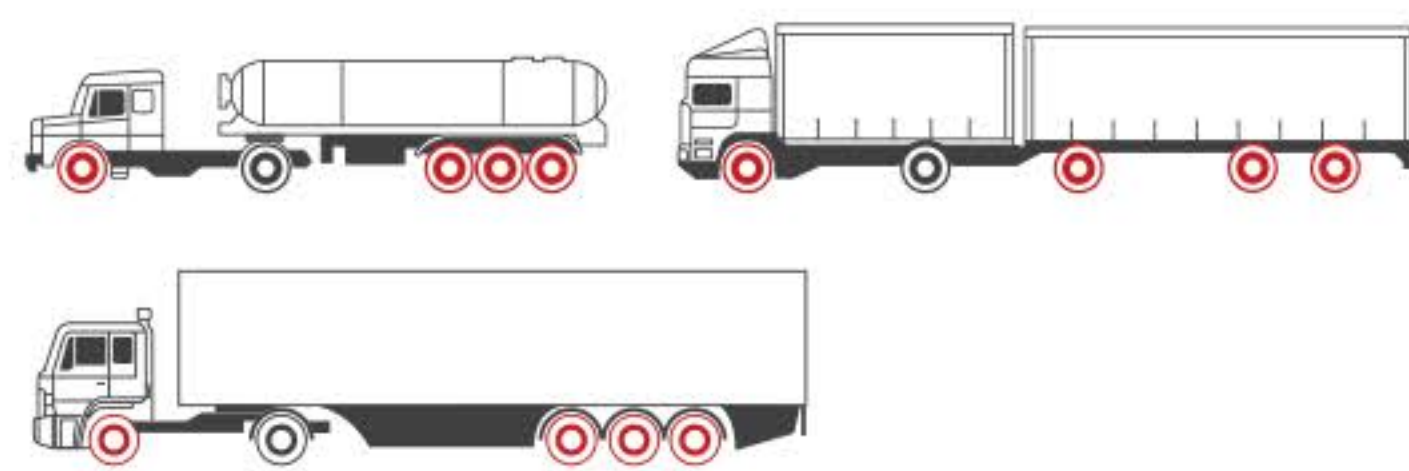

BRISBANE
 28 Ashover Rd
 Rocklea
 QLD 4106

MELBOURNE
 41 Paraweena Dr
 Truganina
 VIC 3029

SYDNEY
 Rear 46 Redfern St
 Wetherill Park
 NSW 2164

PERTH
 8 Glassford Rd
 Kewdale
 WA 6105

