



DX671 REGIONAL TRAILER

| Size | Standard Rim | PR | Load | | | | Pressure | | | | Load Index | | TreadDepth (mm) | Speed Grade | Inflated Tire Dimension (mm) | |
|----------------|--------------|----|------|---|------|---|----------|---|-----|---|------------|---|-----------------|-------------|------------------------------|-----|
| | | | KG | | lbs | | kPa | | psi | | S | D | | | D | B |
| | | | S | D | S | D | S | D | S | D | | | | | | |
| VN 385/65R22.5 | 11.75 | 20 | 4500 | | 9920 | | 900 | | 130 | | 160 | | 17.5 | K | 1072 | 389 |

Trailer position tire suitable for medium to long distance travel on good roads. Rubber compounding offers excellent wear resistance. Variable pitch and narrow groove design effectively reduce tire noise. Widened running surface improves tire grip;

TIRE FEATURES :

- 1 Sipe design improves heat dissipation, grip, and wet skid resistance.
- 2 Four main grooves offer excellent handling performance for directional position tires.

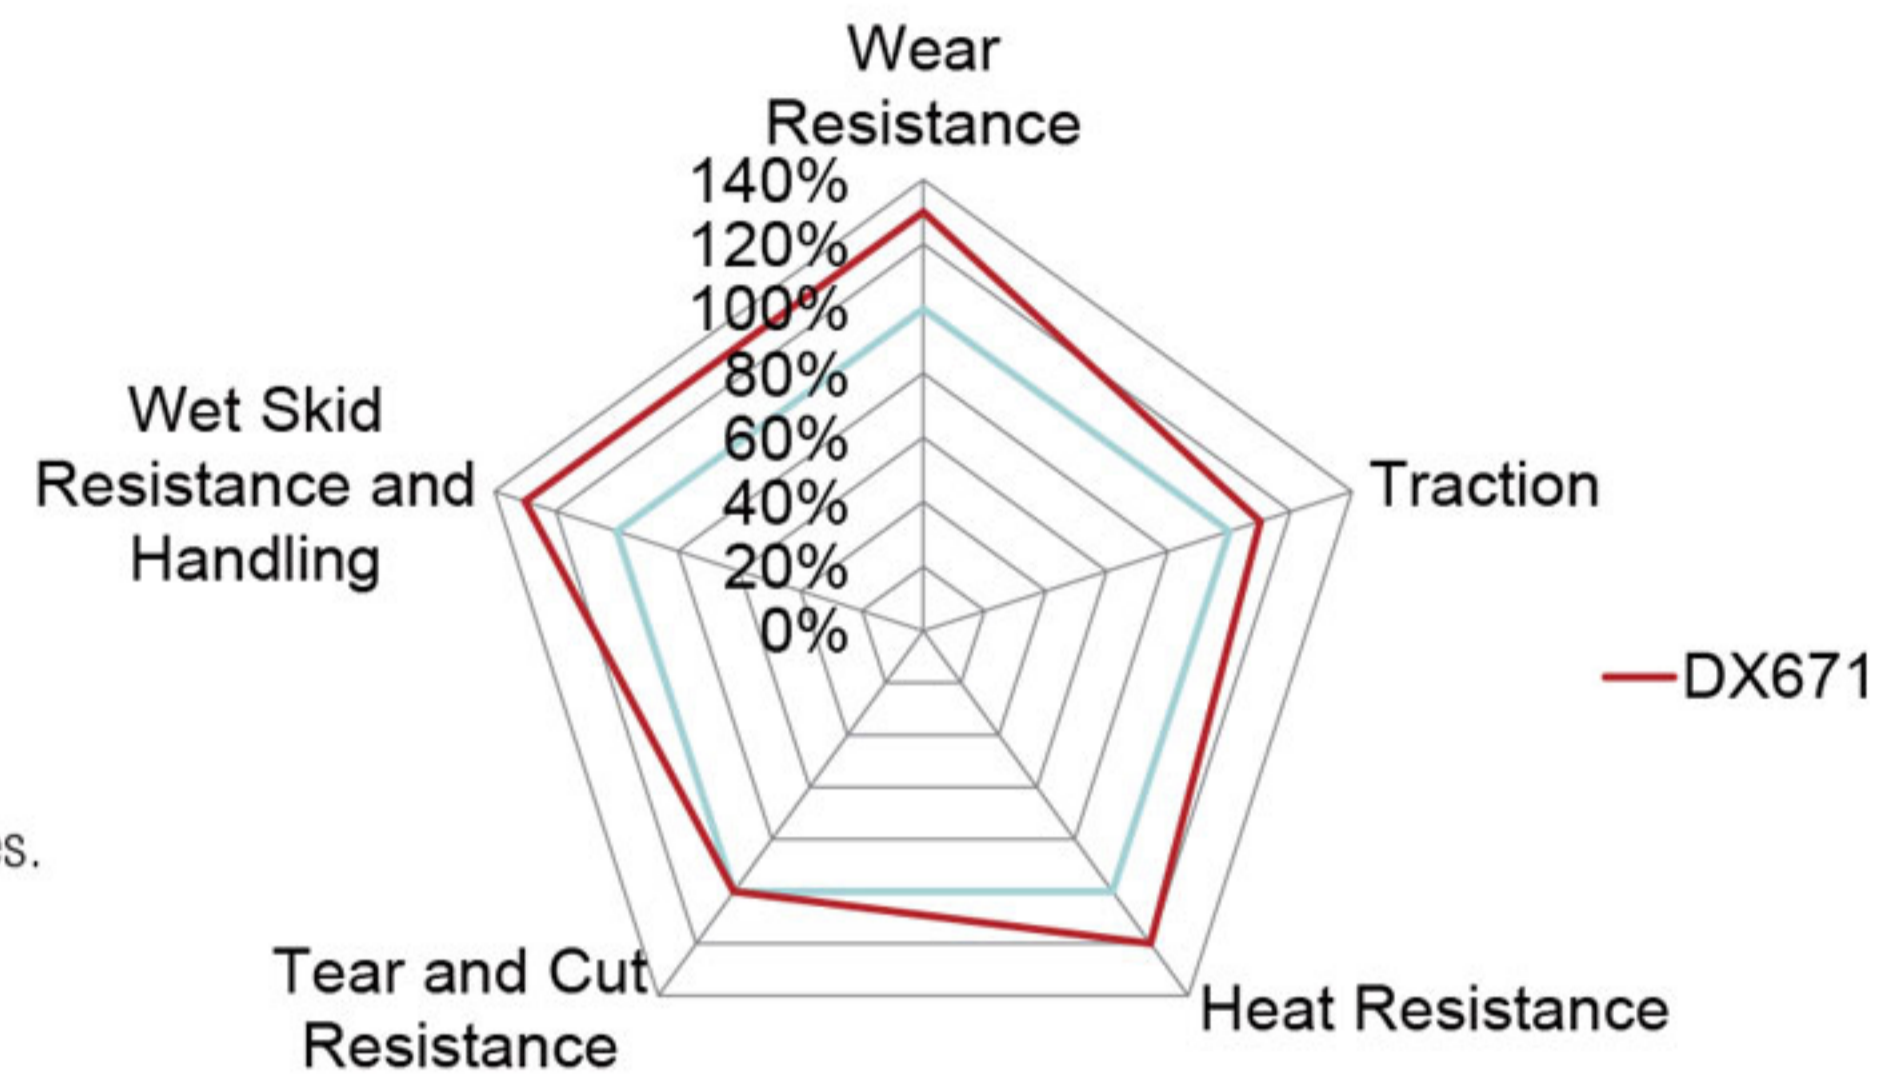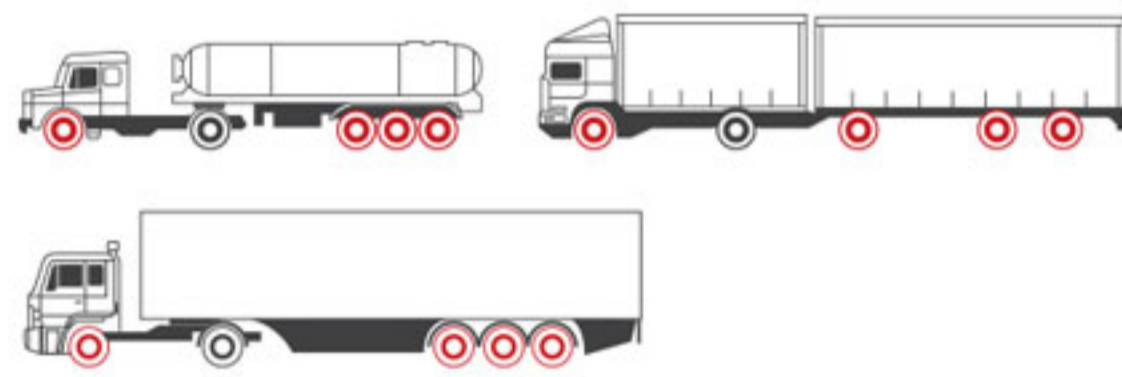

BRISBANE

28 Ashover Rd
 Rocklea
 QLD 4106

MELBOURNE

41 Paraweena Dr
 Truganina
 VIC 3029

SYDNEY

Rear 46 Redfern St
 Wetherill Park
 NSW 2164

PERTH

8 Glassford Rd
 Kewdale
 WA 6105

