


**MS663** ON OFF ROAD  
 DRIVE

Size	Standard Rim	PR	Load				Pressure				Load Index		TreadDepth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			KG		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
CN 295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	18	K	1044	298
VN 315/80R22.5	9.00	18	3750	3450	8270	7160	830	830	120	120	154	151	21	K	1076	312
VN 315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	21	K	1076	312

Horizontal block pattern improves tire grip and traction.  
 The deepened tread and compounding that improves wear and tear resistance help improve tire mileage.  
 High-strength carcass material improves heavy load carrying capacity.  
 Arched groove bottom improves the self-cleaning ability of the tire to reduce stone retention.

**TIRE FEATURES:**

- 1 Large tread blocks are designed with central grooves to improve traction on non-paved roads.
- 2 Open shoulder design increases self-cleaning performance and traction on non-paved roads.
- 3 Arced groove bottom and tread compounding improve puncture resistance
- 4 Greater material distribution improves overall tire safety.

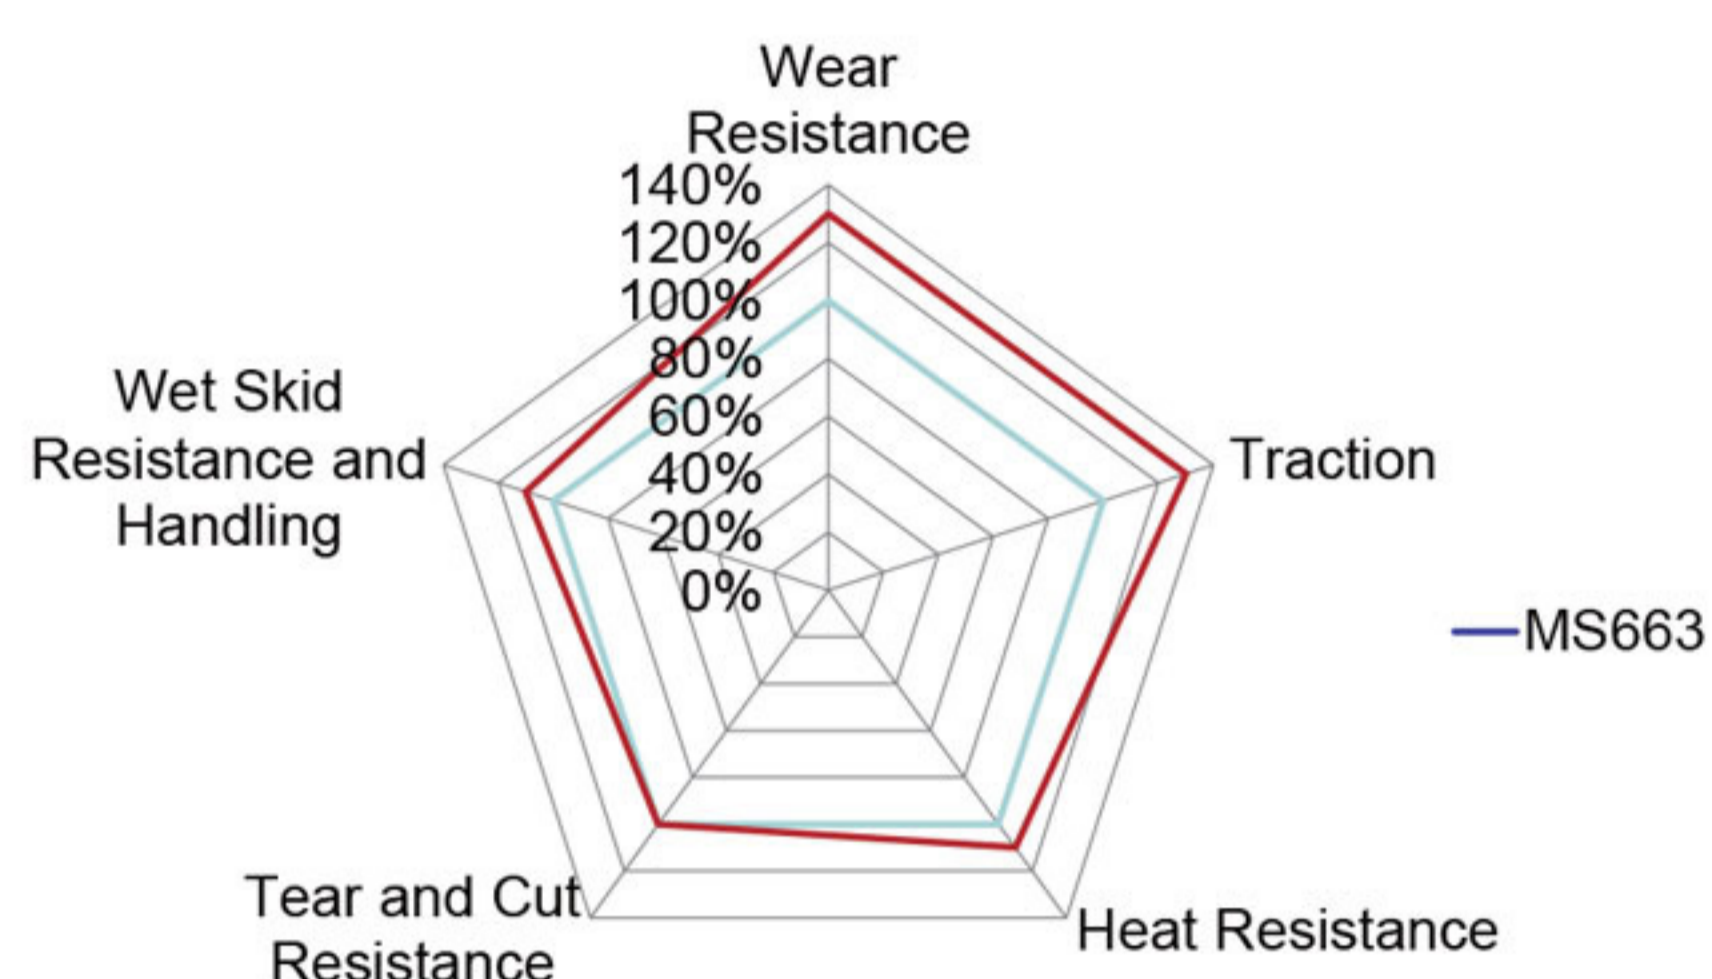

**BRISBANE**  
 28 Ashover Rd  
 Rocklea  
 QLD 4106

**MELBOURNE**  
 41 Paraweena Dr  
 Truganina  
 VIC 3029

**SYDNEY**  
 Rear 46 Redfern St  
 Wetherill Park  
 NSW 2164

**PERTH**  
 8 Glassford Rd  
 Kewdale  
 WA 6105

